


CASAR HALF LOCK COIL ROPE

- Guide or rubbing rope
- Round and shaped wires
- Special design to increase wear and corrosion resistance
- Conforms to EN12385-7



PROPERTIES

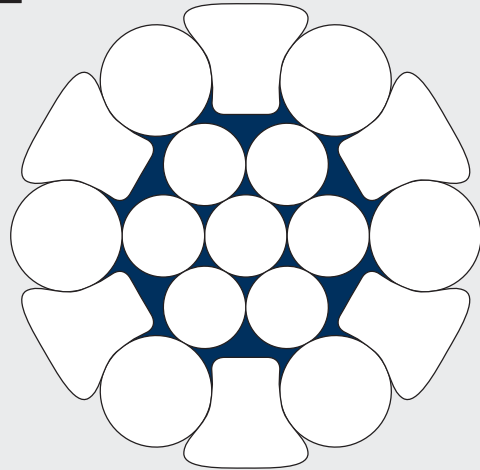

Lubricated



Tolerance

APPLICATIONS

Our half locked coil guide ropes according to EN12385-7 standard are available in various sizes and designs, but can be modified to meet the individual requirement. This rope design is used as guide or rubbing ropes for underground mining applications.

Nominal Diameter		Weight		Aggregate Breaking Force	
mm	inch	kg/m	lb/ft	kN	lbs
29		4.6	3.09	455.4	102,378
32		5.6	3.76	554.1	124,567
35		6.7	4.50	663.4	149,139
38		7.9	5.31	784.4	176,341
41		9.3	6.25	909.7	204,510
45		11.1	7.46	1093.3	245,785
48		12.7	8.53	1241.9	279,192
51		14.3	9.61	1411.7	317,364

Product specifications are subject to change without notice or obligation. The shown drawings or cross sections are only for illustrative purposes; the images can vary depending on requested diameter and current status of technical development. This table is for reference only. Additional sizes available upon request.